

Introduction

Individual tubes are fitted with SMD LEDs (pitch 40mm), which offer a luminous intensity of 2,360mcd per pixel. The diameter of the tube is 16mm, and the tubes can be up to 8m high.

With our new control system, this kind of led strips can play animation, text video, DVD and real-time video.







Feature

Flexible tubes and modules can form:

•curvy display

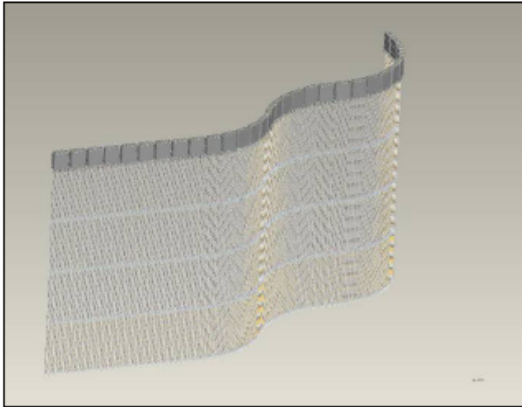



•flat display

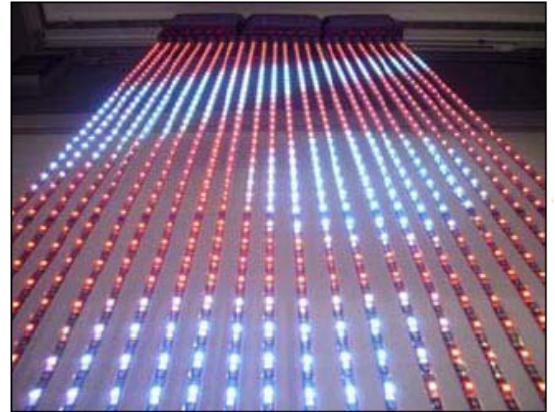

Feature



•Easy install and disassembly

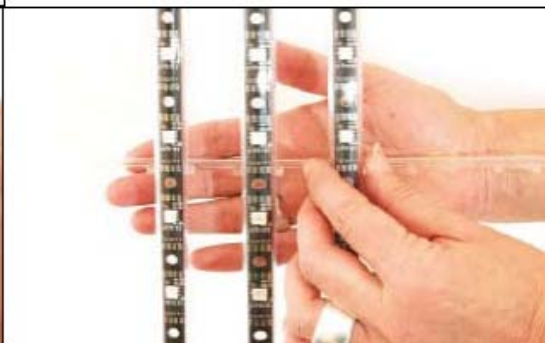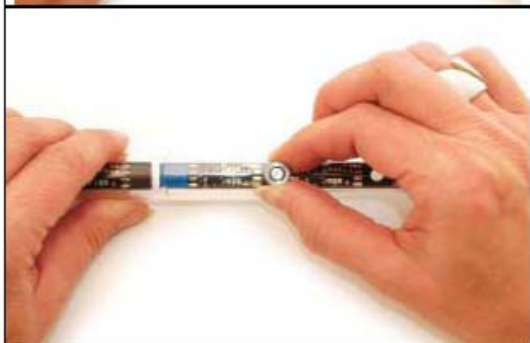



Feature



Easy to transport

- Packed by Flight Case,
Easy to Transport

- Each Case Fits 4 Control
Racks and 256 Tubes.

Technical Specification

Light Source: 3 in 1 SMD

Beam Angle: 120°

Tube Dimension: 1m (L) × \varnothing 16mm(D)

Pitch: 40mm

Tube Pixel: 24nodes/m

Tube Weight: 250g/m

Control Rack Weight: 6kg

Control Rack Dimension: 320mm(L) *100(W) *420mm(H)

Max. Control Pixel: 1024 × 192, 40m(L) × 8m(W)

Pixel Intensity: 576nodes/m²

Brightness: 1200nit/m²

Average Power Consumption: 220W/m²



Applications

Hotel and Restaurant





Applications

Shopping Mall

